

Permanent protection with minimum effort



Liwa DuraClean system for wood decking

*Superior protection of wooden decks and
other external wood.*

- ➔ Provides a long lasting and esthetically appealing wooden surface in desired color.
- ➔ Fossilizes the wood to protect it against contamination and deterioration for a long time, with a minimum of maintenance.
- ➔ Economical and environmentally superior method for protection of wooden decks, jettys, fences and other unpainted exterior wood.
- ➔ Built on Prebona CompoTech patented technology.
- ➔ Easy and quick method in three steps. The wooden surface is ready to use as soon as the surface has dried after treatment.

Liwa DuraClean

DuraClean system for wood decking protects against dirt and deterioration for a long time with a minimum of maintenance.

Easy and quick method provides aesthetically pleasing and resistant wooden surfaces, e.g. wooden decks, fences and jettys.

For further information, please contact us at:

Phone: +46(0) 40 49 06 40

Email: info@liwafarg.se

LIWA

Prebona CompoTech™

All Liwa DuraClean products are reinforced with Prebona CompoTech. Prebona CompoTech is a patented technology that makes wooden surfaces super strong, resilient by a process called fossilizing.

Prebona CompoTech also makes surfaces dirt repellent to ensure clean surfaces with a minimum of maintenance for an extended period of time. Please visit www.prebona.com for more information on Prebona CompoTech.

Prebona*

3 EASY STEPS




Liwa DuraClean system for wood decking is utilizing a combination of unique technologies resulting in a truly revolutionizing system for protection of external wood. All Liwa DuraClean products are based on Prebona CompoTech patented technology from Prebona AB.

Liwa DuraClean system for wood decking combines and optimizes the best properties of traditional high quality wood oil and conventional silica treatments, providing superior wood protection, great aesthetics, easy application and exceptional durability with a positive environmental profile.



BEFORE

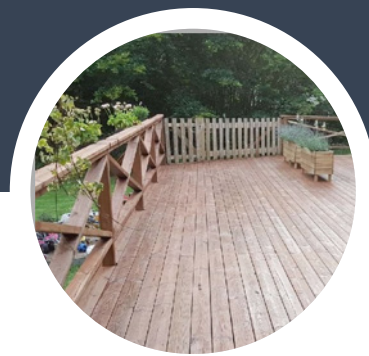

AFTER

1

Clean with Liwa DuraClean Wood Wash: Before treatment of a wooden surface with Liwa DuraClean Fossilizer, the wood should be clean and dry. Both new and restored wood panels should be cleaned with Liwa DuraClean Wood Wash to start the fossilizing process. Let dry before proceeding.

2

Fossilize the wood with Liwa DuraClean Fossilizer: Apply Liwa DuraClean Fossilizer with a low pressure sprayer or with a brush. For best results, repeat the treatment once. Let the surface dry for at least an hour after the first application, before applying the product a second time. When the surface is dry, normally after about an hour, the surface can be treated with Liwa DuraClean Wood Oil to make it even more resistant and give it a desired color.

3

Finish with Liwa DuraClean Wood Oil: After treatment with Liwa DuraClean Fossilizer, the wooden surface is treated with Liwa DuraClean Wood Oil to provide extra durability and desired color. Treatment can be done right after the surface is dry, or at a later occasion. Liwa DuraClean Wood Oil is applied with a low pressure sprayer or with a brush. After the oil has dried, the surface can be used.

Liwa DuraClean system for wood decking provides a lasting protection against contamination and wear. When the surface needs cleaning, use Liwa DuraClean Wood Wash. If necessary, Liwa DuraClean Fossilizer and Wood Oil can be reapplied after some time to refreshen and make the wood even tougher. Surfaces treated with Liwa DuraClean system becomes comfortable to tread.